


JOSPER

*olimpo*

*model*



Options

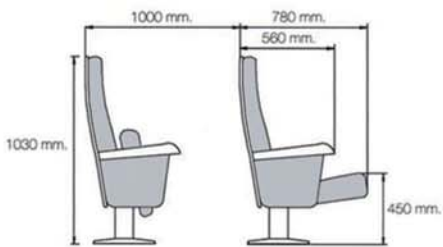

*olimpo*

*model*

*Armrest/Sides*

*Metal Parts with thermohardened epoxi powder coating,70-80 microns, and antirusting treatment.  
Middle and end of row armrest of varnished plywood.  
Upholstered end of row panel.*

*Backs*

*Reinforced polypropylene structure.  
Ergonomic backrest cushion in cold-molded polyurethane foam, high density.  
Upholstered with monoblock system, without seams or sewn.  
Fire-proof Trevira CS fabric. Texture, design and colors at costumer choice.  
Backrest board in plywood, high-frequency bending and varnishing.*

*Seats*

*Metal structure made of electro-welded steel plate and tube with continuous arc.  
System by spring steel elastic zig-zag.  
Ergonomic backrest cushion in cold-molded polyurethane foam, high density.  
Fire-proof Trevira CS fabric. Texture, design and colors at costumer choice.  
Tip-up seat by double steel springs housed in self-lubricating nylon bearings, quiet and free maintenance.  
Certified more than 500.000 cycles.*

*Polyurethane foam*

*Seat density: 65 Kg./m3  
Bacvk density: 55 Kg./m3*

*Paint*

*Epoxi Powder coating  
thickness coating: 70-80 microns  
Grid adherence 100%*

	UNE 23727-90	BS-5852
Foam	M4	Ignition source 5
Upholstery	M1	Ignition source 0&1
Barniz	M1	

*Upholstery*

*pilling resistance: ISO 12947 value 5*

UNE EN 1.021:2006 Parte 1  
UNE EN 1.021:2006 Parte 2

*Plywood*

*High-pressure shaped and varnished  
of two polyurethane components beech board.*